

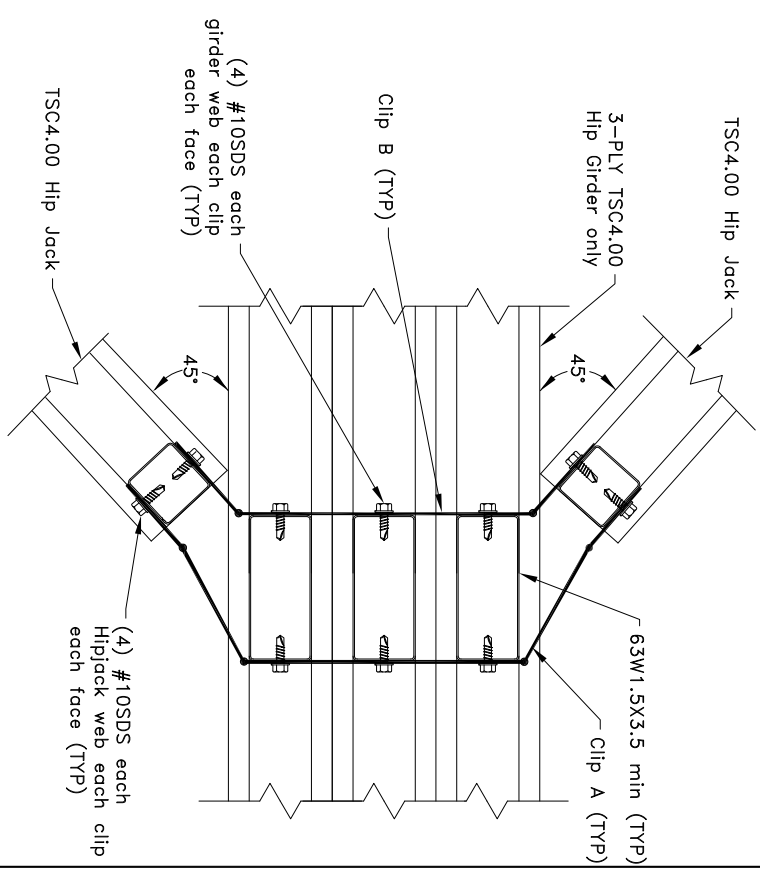


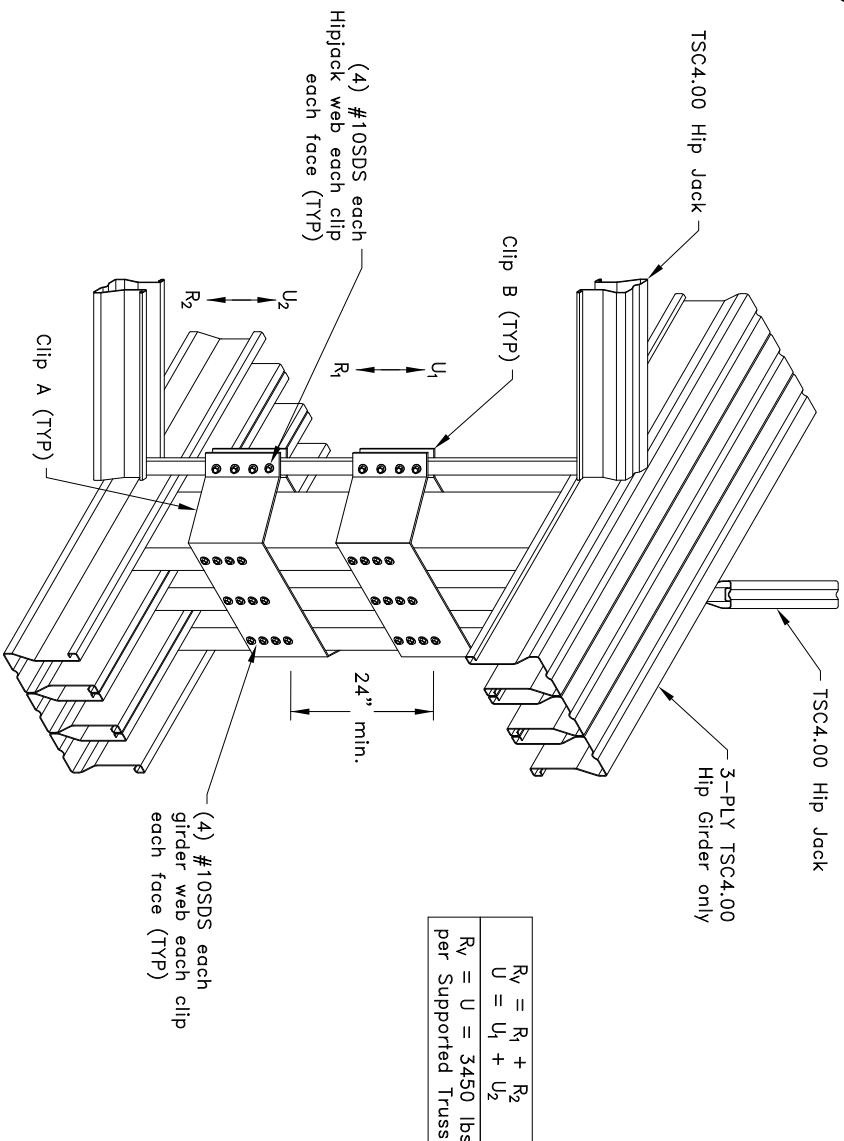

Plan View

General Notes:

1. SDS = self-drilling tapping screw
2. All edge distances, end distances, and spacings are $\frac{5}{16}$ " minimum.
3. Truss must be analyzed with concentrated loads directly in line with correctly placed girder vertical webs.
4. R_v refers to vertical reaction, U refers to uplift.
5. ● = Clip Bend; Bend clip only once.
6. Cold-Formed Steel calculations are per the 2010 supplement to the AISI 2007 "North American Specification for the Design of Cold-Formed Steel Structural Members" (S100-07/S2-10).

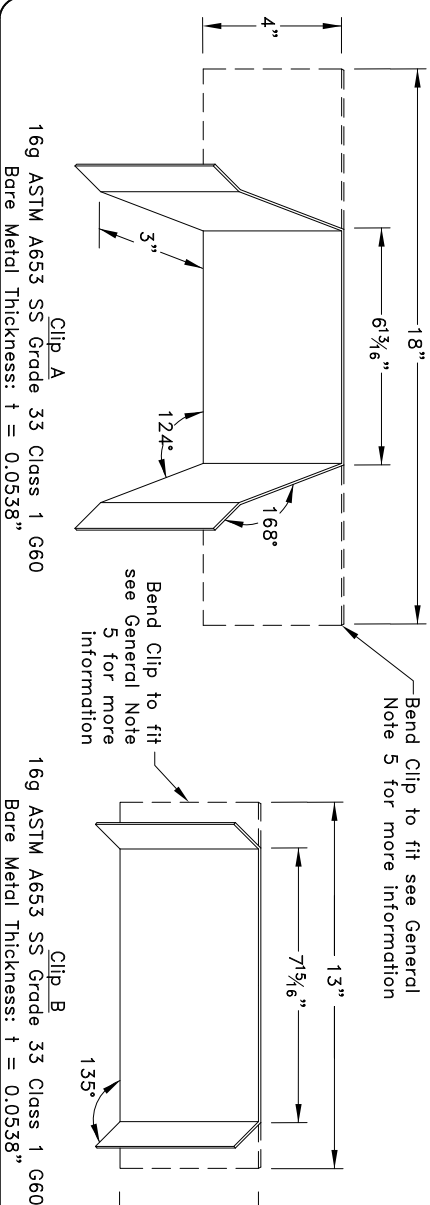

TrusSteel
An ITW Company

www.TrusSteel.com

Florida: 1950 Manley Drive / Haines City, FL 33844 / (800) 755-6001
Missouri: 13389 Lakeloft Drive / Earth City, MO 63045 / (800) 326-4102
California: 8351 Rovana Circle / Sacramento, CA 95828 / (800) 877-3678

45° 3-Ply Hip Girder Truss-To-Truss Connection

ITW Building Components Group, Inc. shall not be responsible for any performance failure in a connection due to a deviation from this detail. Any variation from this detail shall be approved in advance by ITW Building Components Group, Inc.

Custom Detail:

TS-CD-TT-4507-005

Date:

11/18/11

Custom Detail Category:

Truss-to-Truss Connection